


Product data sheet





Miline Uno Surfaced M

23W 3300lm 830 LWL

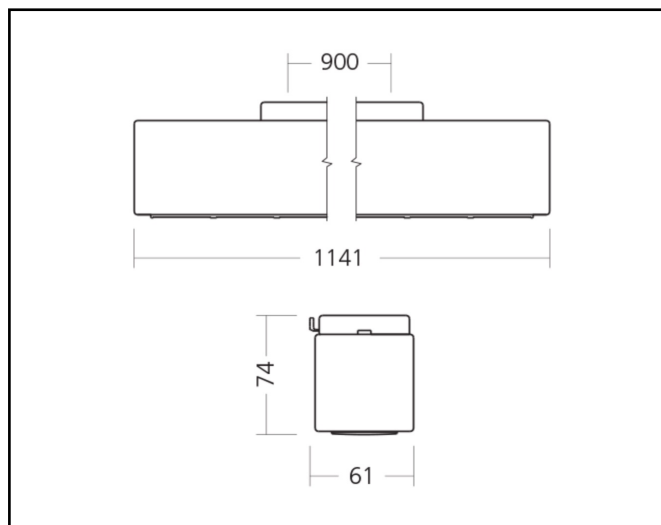


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	3300 lm
Efficacy – LOR (lm/W)	143 lm/W
Power (driver incl.)	23 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

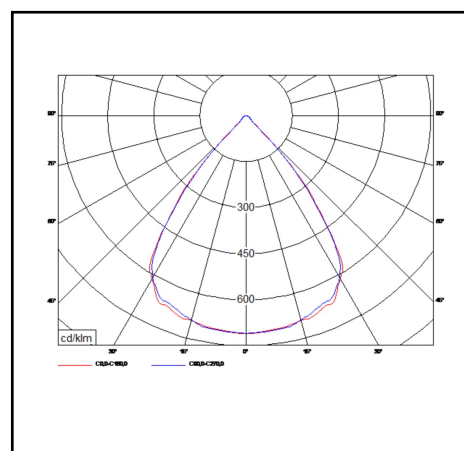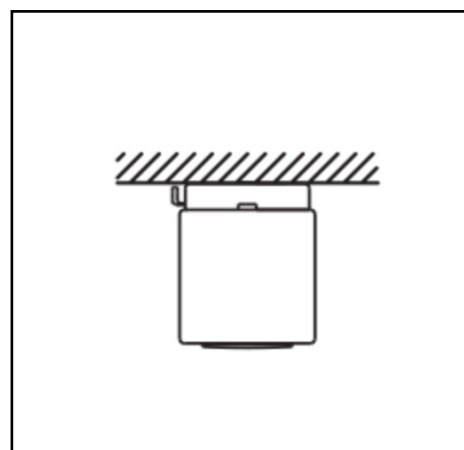

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

23W 3450lm 840 LWL

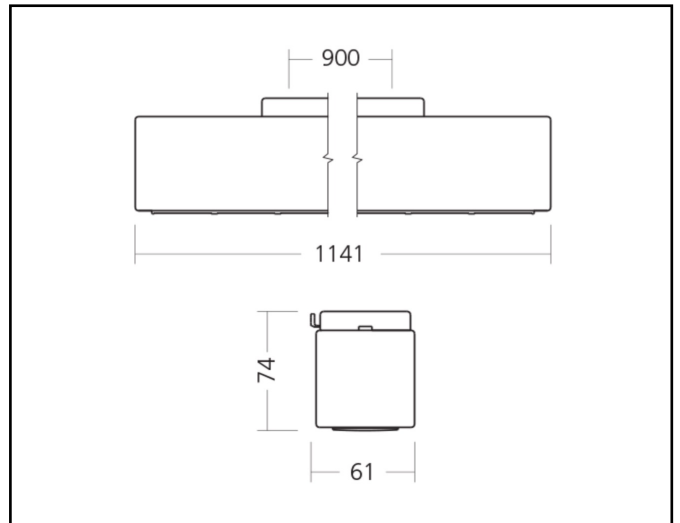


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	‘000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	3450 lm
Efficacy – LOR (lm/W)	150 lm/W
Power (driver incl.)	23 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

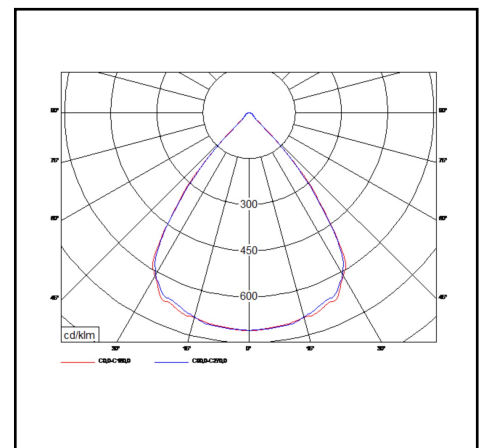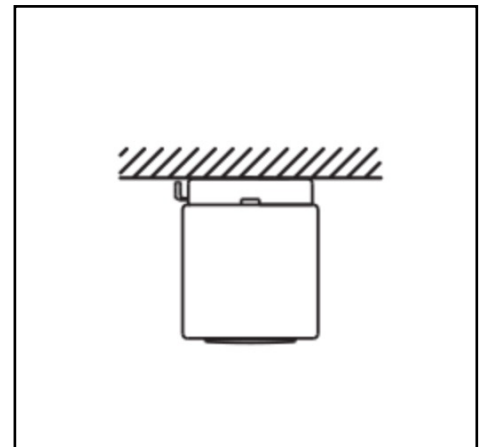

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

31W 4350lm 830 LWL

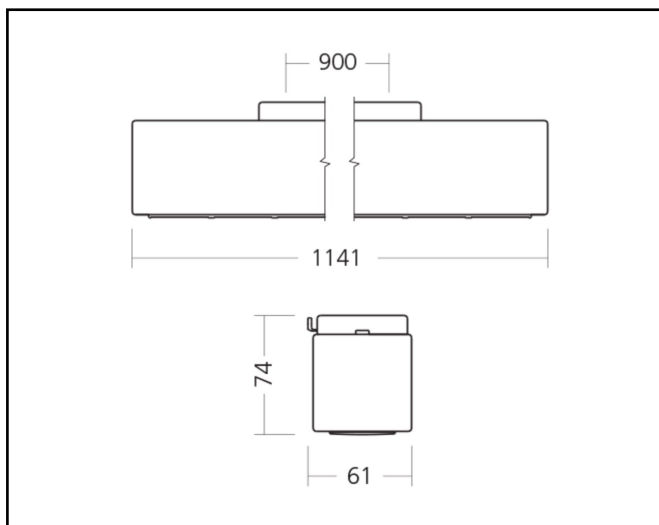

Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4350 lm
Efficacy – LOR (lm/W)	140 lm/W
Power (driver incl.)	31 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

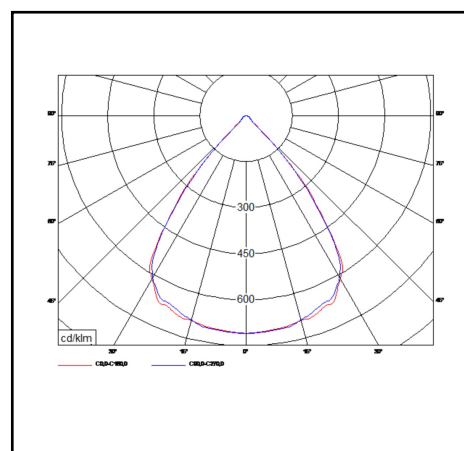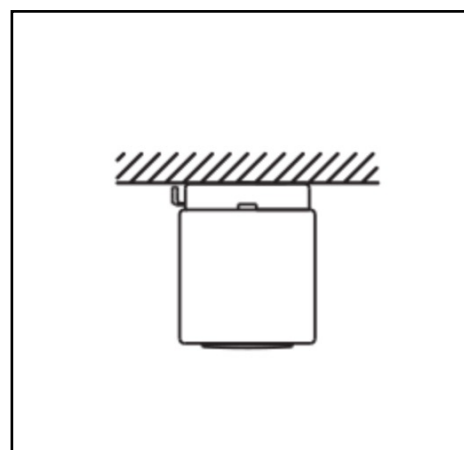

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

31W 4500lm 840 LWL

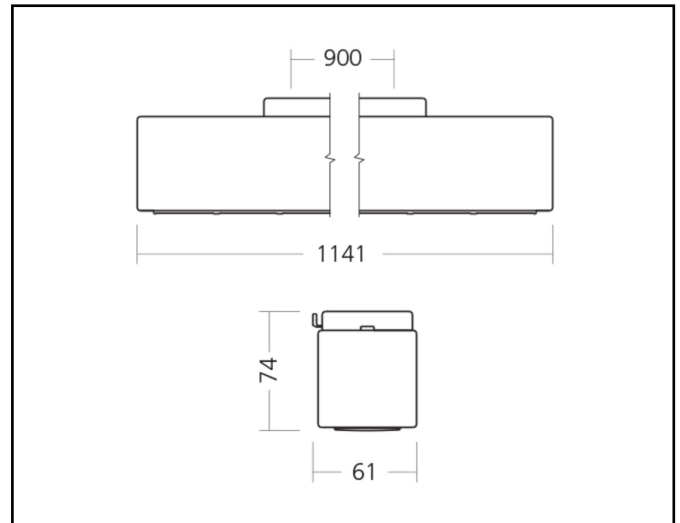

Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	4000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4500 lm
Efficacy – LOR (lm/W)	145 lm/W
Power (driver incl.)	31 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

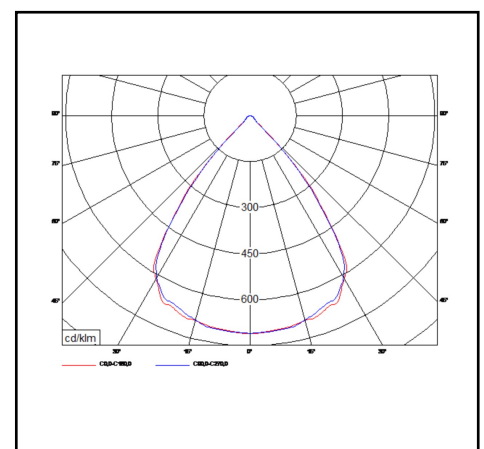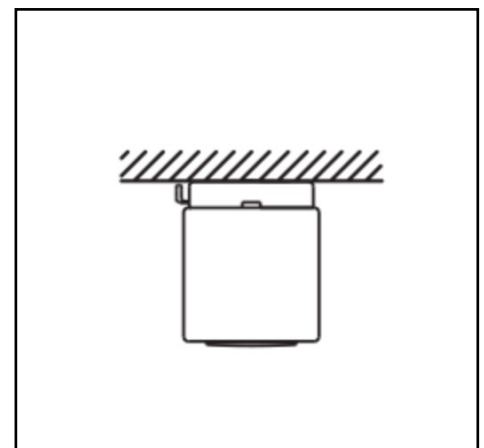

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

23W 3100lm 830 LBL

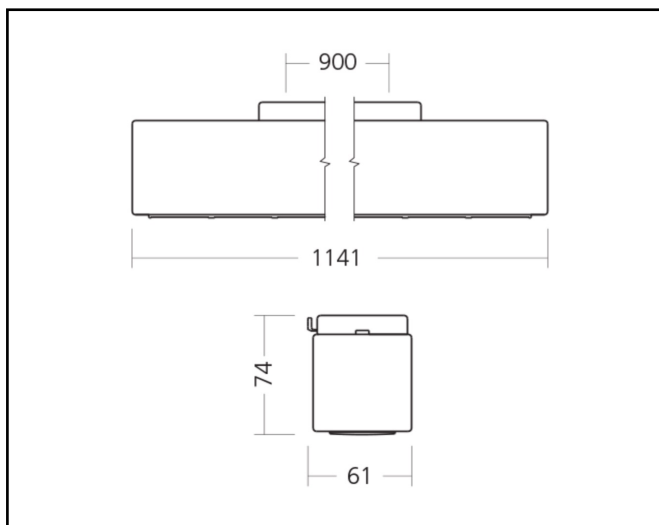


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + black louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	3100 lm
Efficacy – LOR (lm/W)	135 lm/W
Power (driver incl.)	23 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

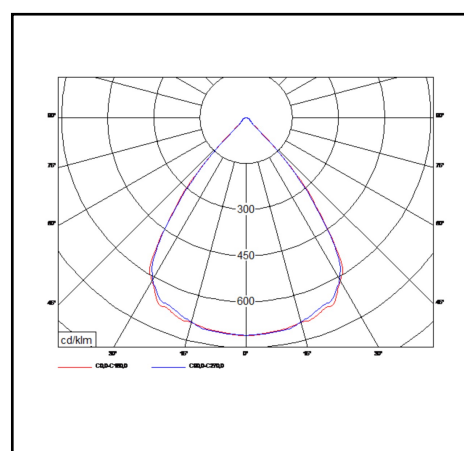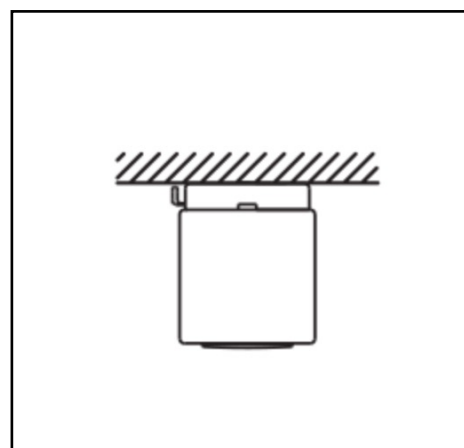

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

23W 3250lm 840 LBL

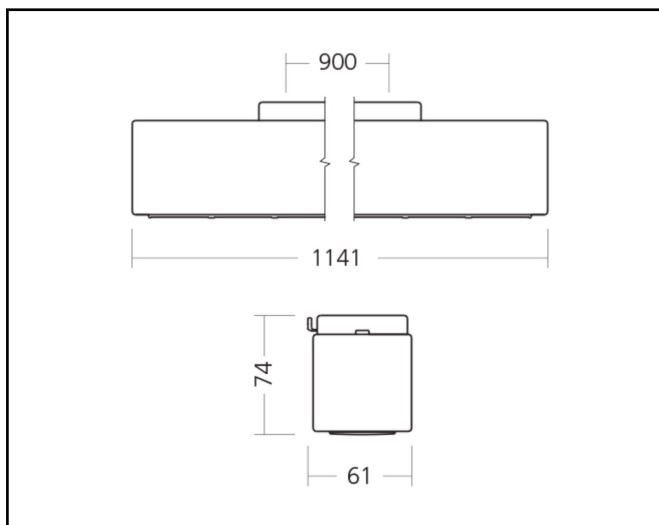


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + black louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	4000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	3250 lm
Efficacy – LOR (lm/W)	141 lm/W
Power (driver incl.)	23 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

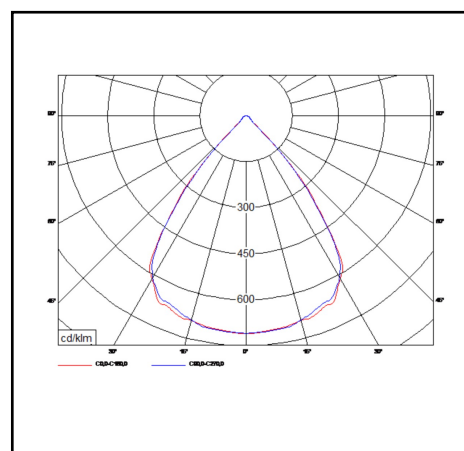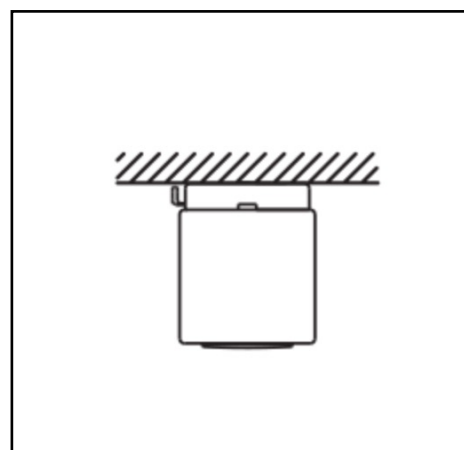

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

31W 4100lm 830 LBL

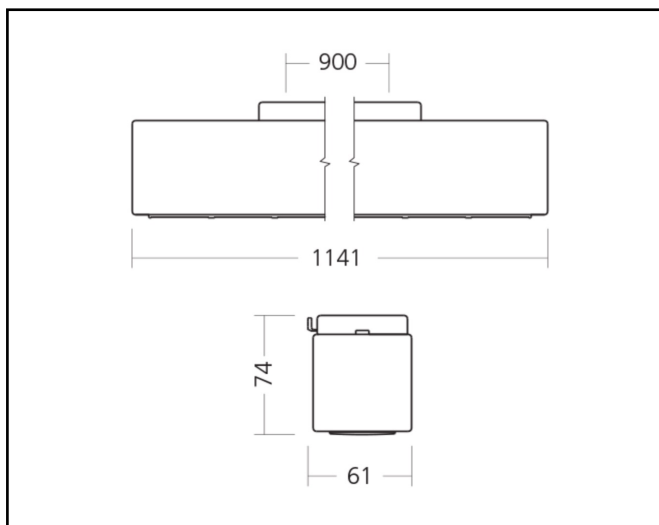


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + black louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4100 lm
Efficacy – LOR (lm/W)	132 lm/W
Power (driver incl.)	31 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

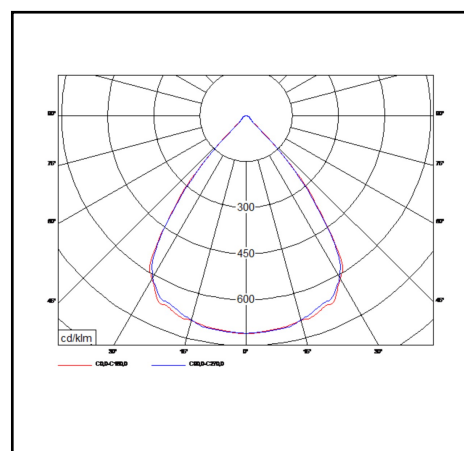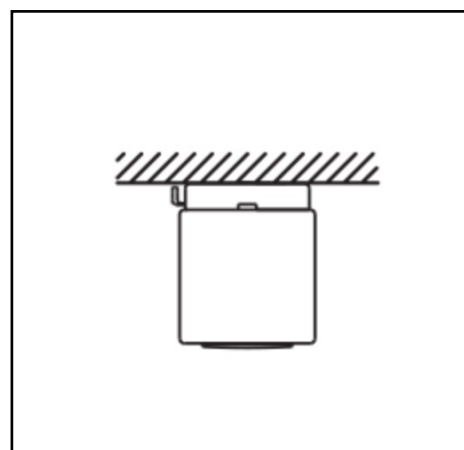

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced M

31W 4300lm 840 LBL

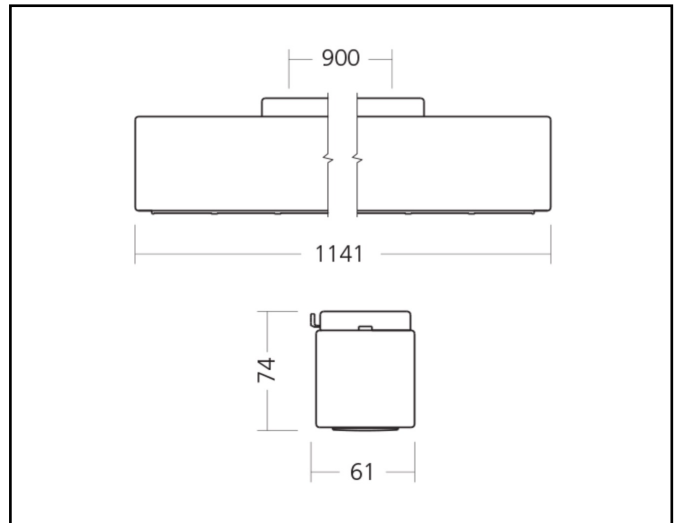


Description	Surface mounted lighting fixture
Dimensions (mm)	1141mm x 61mm x 74mm
Weight (kg)	2,800 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + black louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	4000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4300 lm
Efficacy – LOR (lm/W)	139 lm/W
Power (driver incl.)	31 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

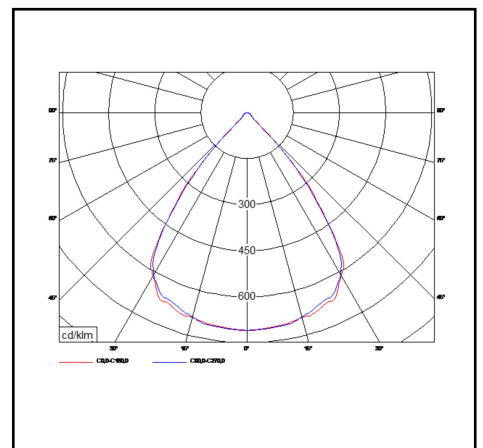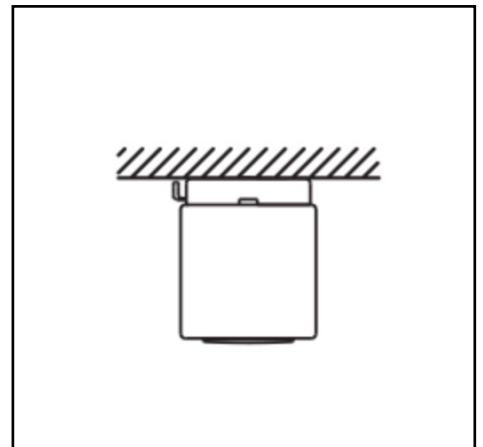

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced L

27W 4100lm 830 LWL

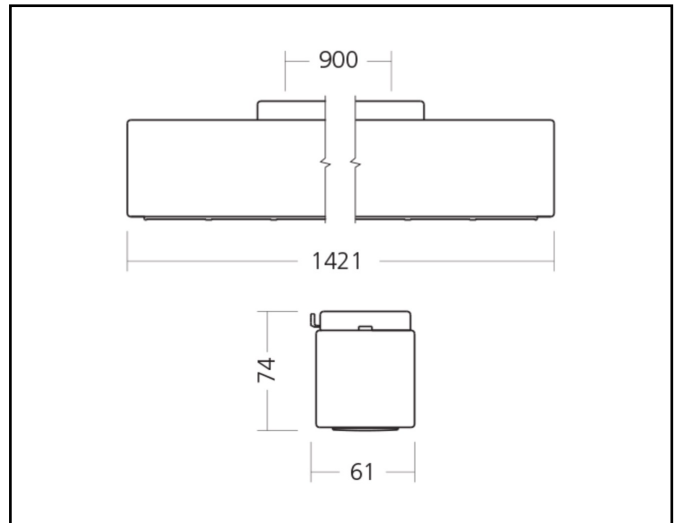


Description	Surface mounted lighting fixture
Dimensions (mm)	1421mm x 61mm x 74mm
Weight (kg)	3,300 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4100 lm
Efficacy – LOR (lm/W)	152 lm/W
Power (driver incl.)	27 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

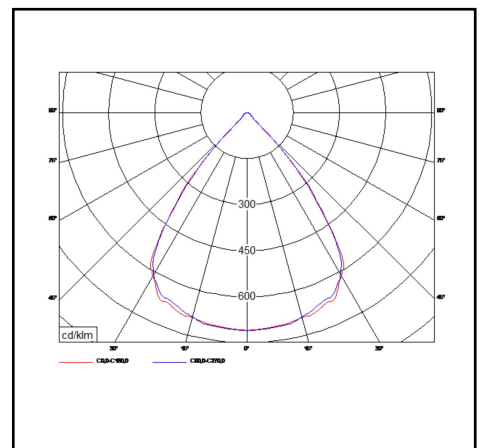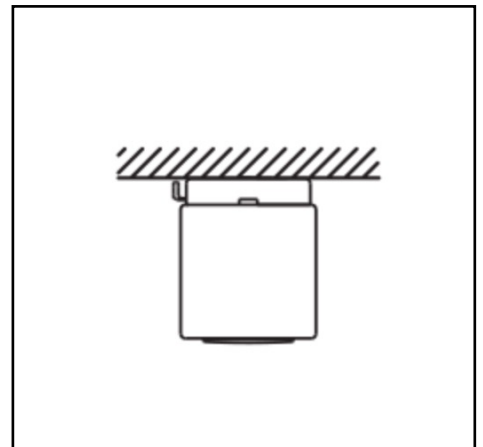

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced L

27W 4300lm 840 LWL

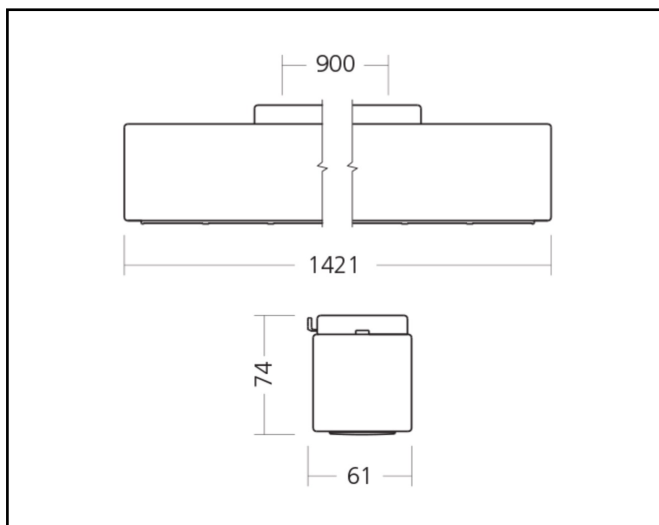


Description	Surface mounted lighting fixture
Dimensions (mm)	1421mm x 61mm x 74mm
Weight (kg)	3,300 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	4000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	4300 lm
Efficacy – LOR (lm/W)	159 lm/W
Power (driver incl.)	27 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

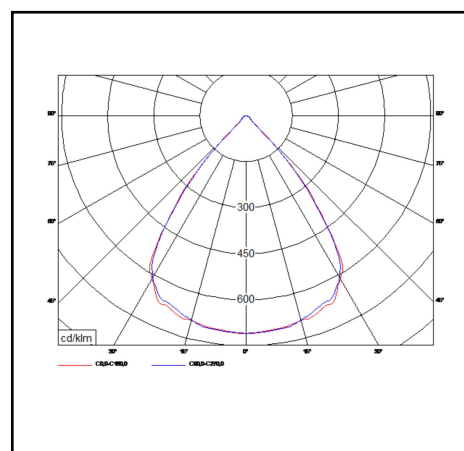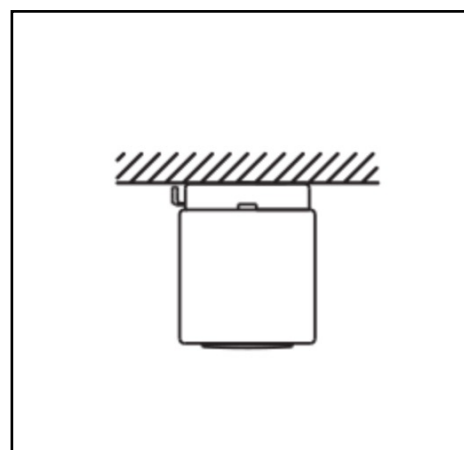

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet





Miline Uno Surfaced L

38W 5500lm 830 LWL

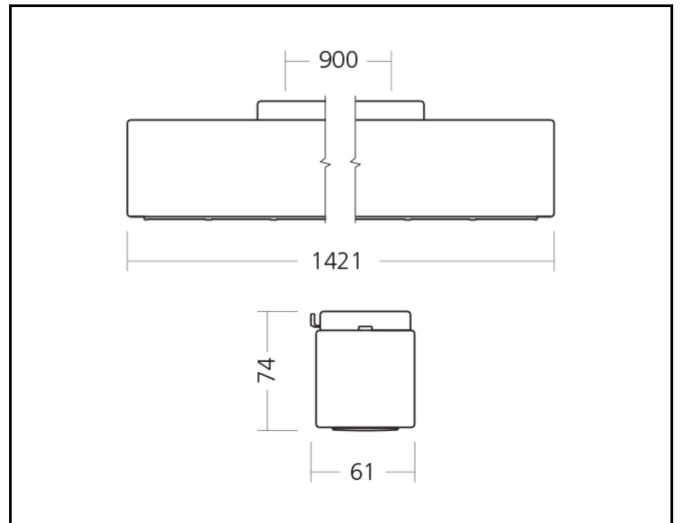


Description	Surface mounted lighting fixture
Dimensions (mm)	1421mm x 61mm x 74mm
Weight (kg)	3,300 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + white louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	5500 lm
Efficacy – LOR (lm/W)	145 lm/W
Power (driver incl.)	38 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

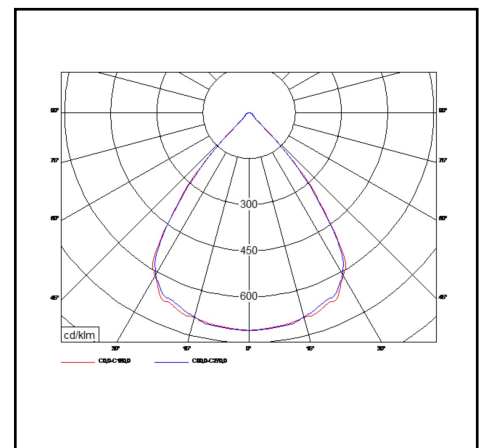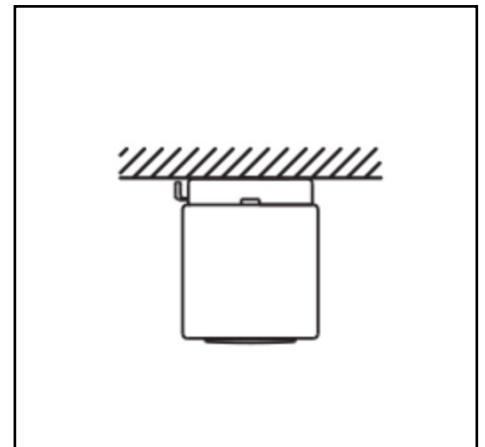

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet



Miline Uno Surfaced L

38W 5800lm 840 LWL

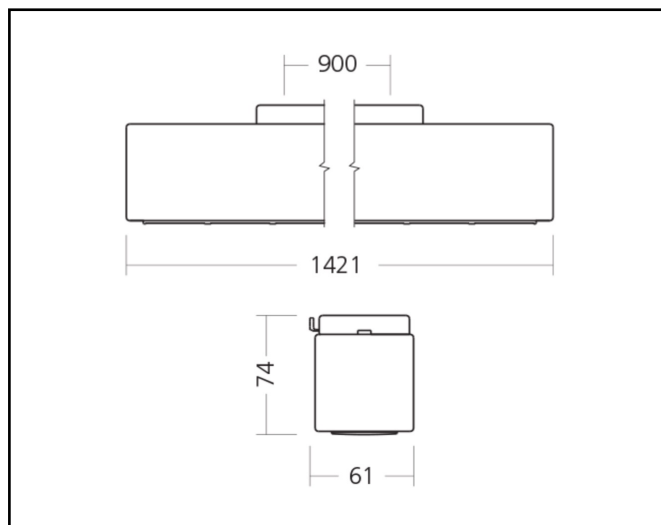

Description Surface mounted lighting fixture

Dimensions (mm) 1421mm x 61mm x 74mm

Weight (kg) 3,300 kg

Housing Steel sheet, painted

Colour White (RAL 9003)

Optical system Lenses 80° + white louvre

Lighting Distribution Symmetric, 80°

Unified Glare Ratio UGR 20

Colour temperature (K) 4000 K

CRI (Ra) > 85

SCDM 3

Net lumen output (25°C) 5800 lm

Efficacy – LOR (lm/W) 153 lm/W

Power (driver incl.) 38 W

Driver Driver incorporated
DALI dimmable on request

IP IP 20

IK IK 02




Lifetime (hours) 100.000 hours L80 B10

Warranty 5 years

Origin Slovákija

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC
ISO 9001:2008

Marks

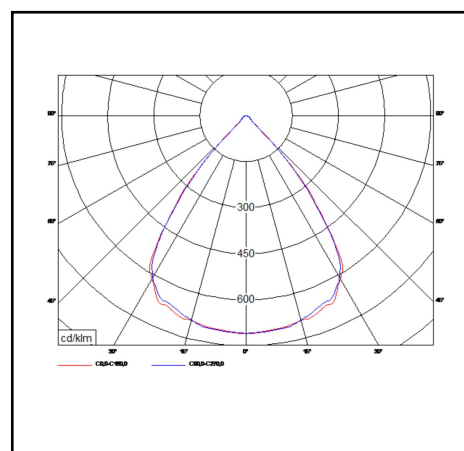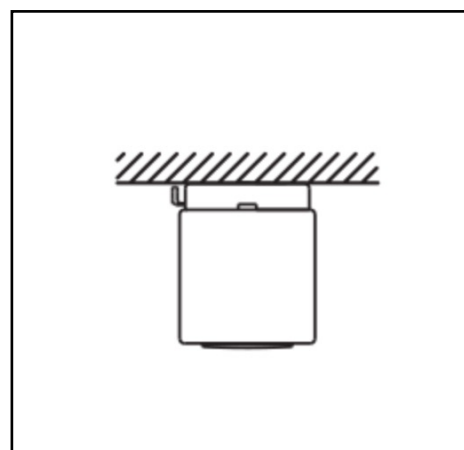

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes


Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Product data sheet





Miline Uno Surfaced L

27W 3900lm 830 LBL

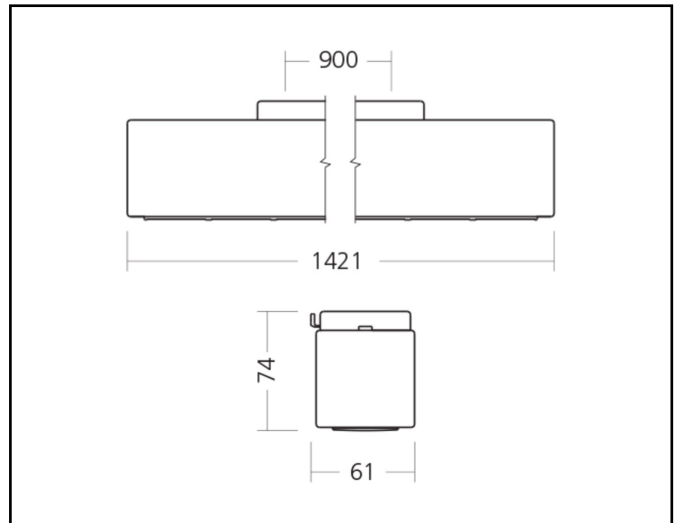

Description	Surface mounted lighting fixture
Dimensions (mm)	1421mm x 61mm x 74mm
Weight (kg)	3,200 kg
Housing	Steel sheet, painted
Colour	White (RAL 9003)
Optical system	Lenses 80° + black louvre
Lighting Distribution	Symmetric, 80°
Unified Glare Ratio	UGR 20
Colour temperature (K)	3000 K
CRI (Ra)	> 85
SCDM	3
Net lumen output (25°C)	3900 lm
Efficacy – LOR (lm/W)	144 lm/W
Power (driver incl.)	27 W
Driver	Driver incorporated DALI dimmable on request
IP	IP 20
IK	IK 02
Lifetime (hours)	100.000 hours L80 B10
Warranty	5 years
Origin	Slovakija
Norms	LVD 2006/95/EC EMC 2004/108/EC RoHS 2001/65/EC ISO 9001:2008

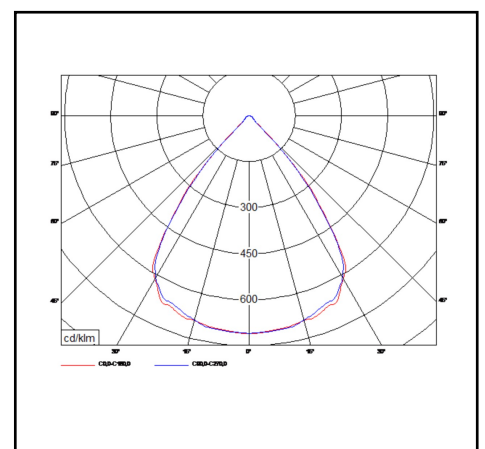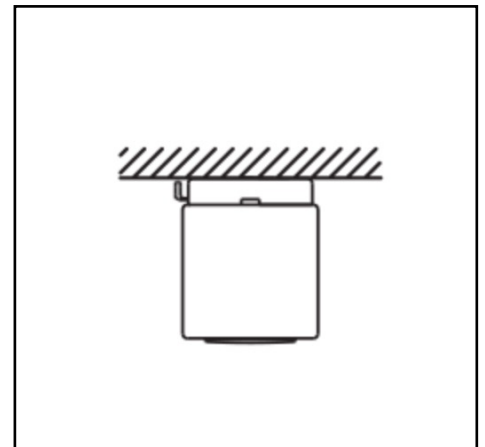

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Marks




Product data sheet



Miline Uno Surfaced L

27W 4050lm 840 LBL

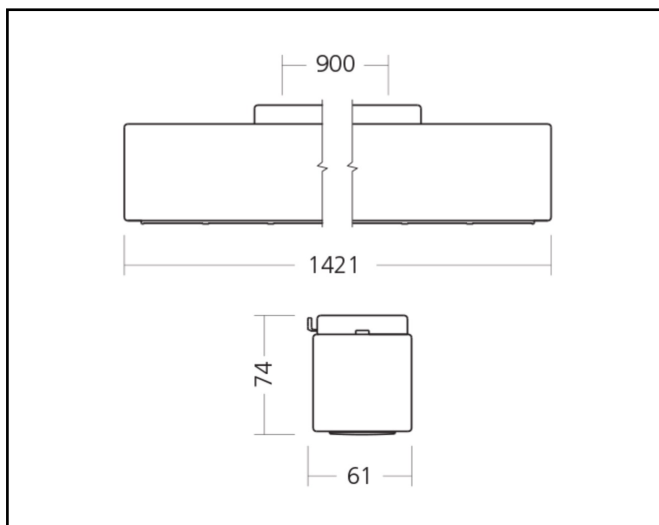

Description Surface mounted lighting fixture

Dimensions (mm) 1421mm x 61mm x 63mm

Weight (kg) 3,200 kg

Housing Steel sheet, painted

Colour White (RAL 9003)

Optical system Lenses 80° + black louvre

Lighting Distribution Symmetric, 80°

Unified Glare Ratio UGR 20

Colour temperature (K) 4000 K

CRI (Ra) > 85

SCDM 3

Net lumen output (25°C) 4050 lm

Efficacy – LOR (lm/W) 150 lm/W

Power (driver incl.) 27 W

Driver Driver incorporated
DALI dimmable on request

IP IP 20

IK IK 02



Lifetime (hours) 100.000 hours L80 B10

Warranty 5 years

Origin Slovákija

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC
ISO 9001:2008

Marks

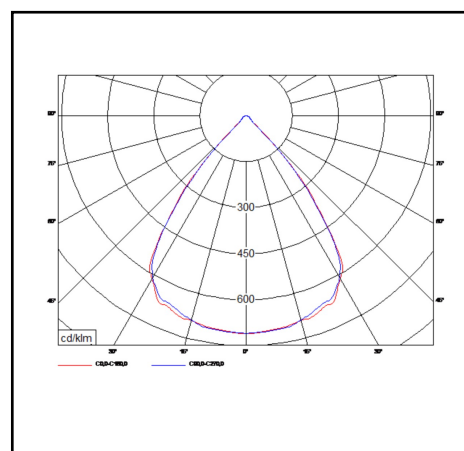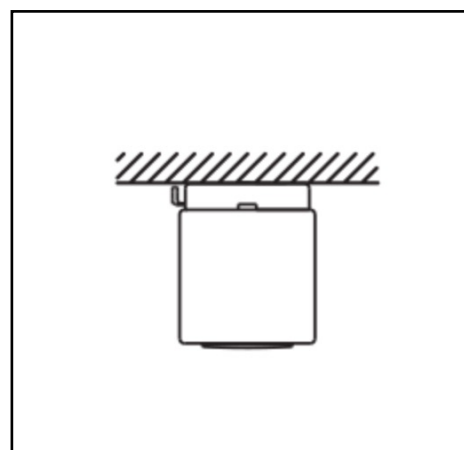

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes


Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Product data sheet



Miline Uno Surfaced L

38W 5200lm 830 LBL

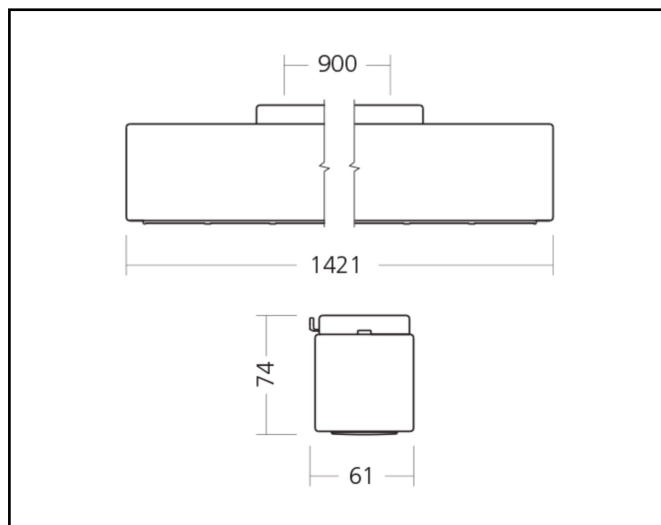

Description Surface mounted lighting fixture

Dimensions (mm) 1421mm x 61mm x 63mm

Weight (kg) 3,200 kg

Housing Steel sheet, painted

Colour White (RAL 9003)

Optical system Lenses 80° + black louvre

Lighting Distribution Symmetric, 80°

Unified Glare Ratio UGR 20

Colour temperature (K) 3000 K

CRI (Ra) > 85

SCDM 3

Net lumen output (25°C) 5200 lm

Efficacy – LOR (lm/W) 137 lm/W

Power (driver incl.) 38 W

Driver Driver incorporated
DALI dimmable on request

IP IP 20

IK IK 02




Lifetime (hours) 100.000 hours L80 B10

Warranty 5 years

Origin Slovákija

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC
ISO 9001:2008

Marks

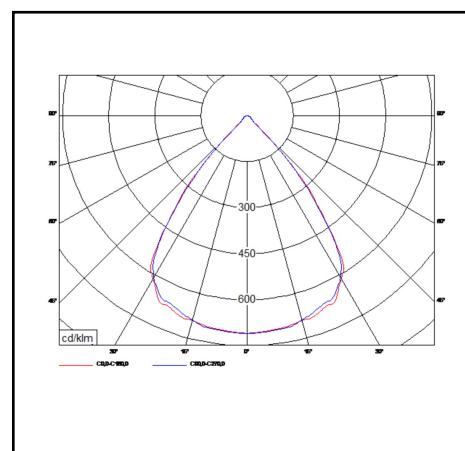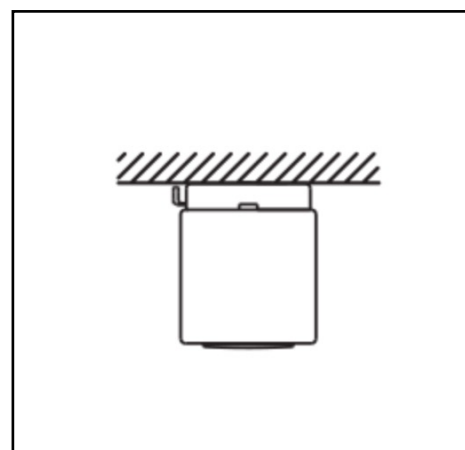

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes


Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10

Product data sheet



Miline Uno Surfaced L

38W 5450lm 840 LBL

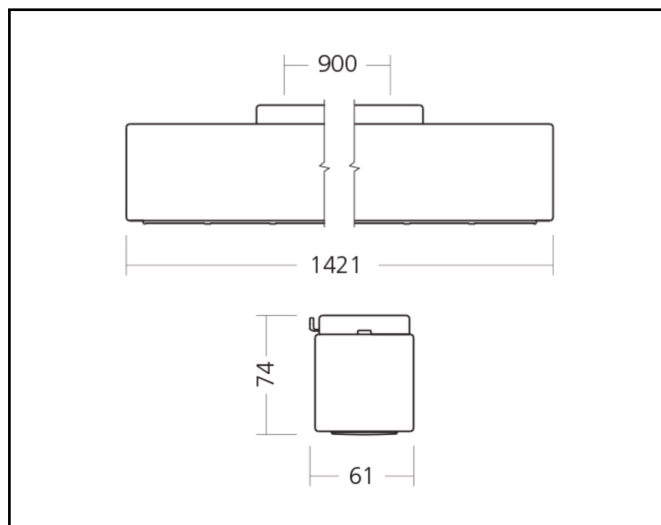

Description Surface mounted lighting fixture

Dimensions (mm) 1421mm x 61mm x 63mm

Weight (kg) 3,200 kg

Housing Steel sheet, painted

Colour White (RAL 9003)

Optical system Lenses 80° + black louvre

Lighting Distribution Symmetric, 80°

Unified Glare Ratio UGR 20

Colour temperature (K) 4000 K

CRI (Ra) > 85

SCDM 3

Net lumen output (25°C) 5450 lm

Efficacy – LOR (lm/W) 143 lm/W

Power (driver incl.) 38 W

Driver Driver incorporated
DALI dimmable on request

IP IP 20

IK IK 02



Lifetime (hours) 100.000 hours L80 B10

Warranty 5 years

Origin Slovákija

Norms LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2001/65/EC
ISO 9001:2008

Marks

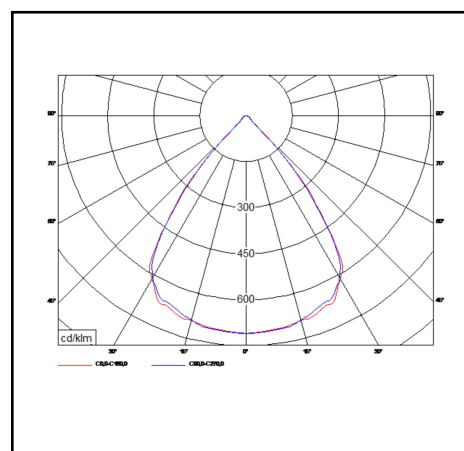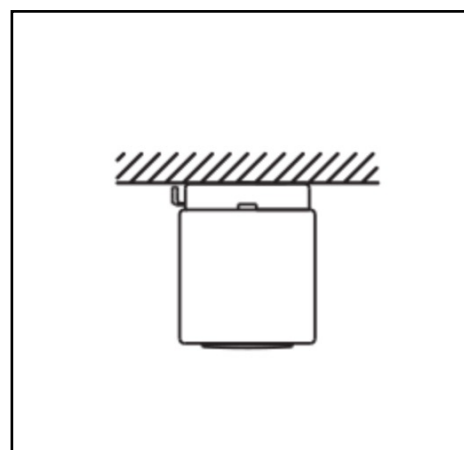

All specifications, descriptions and images are purely informative, not binding and subject to errors and changes

Euro-Luce Light Engineering
Ballingsweg 25 – 9620 Zottegem
info@euro-luce.be
www.euro-luce.be
Tel 0032 54 55 71 10